



Thank you for choosing our products. Please read carefully before using.

### Construction

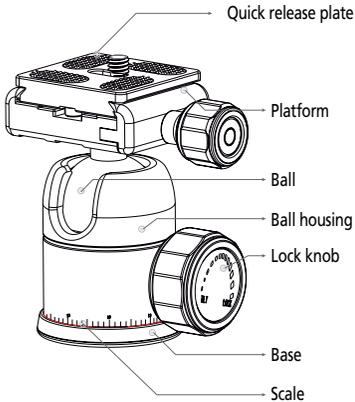


### Clamp

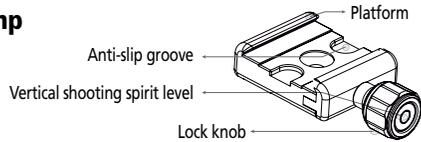

### How to install

1. Align the quick release palte

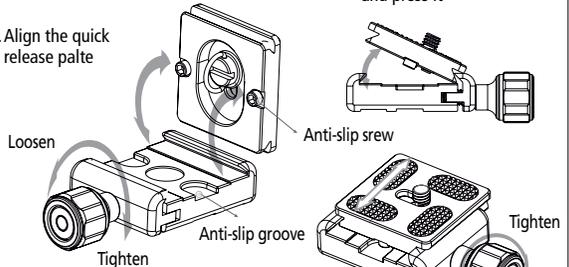

2. Slant the quick release palte and press it

3. Make sure that the quick release plate is well places and that the knob is locked

### Features

1. Locking force and smoothness have been greatly improved.
2. The surface is processed through oxidation and delicate workmanship.
3. 360° scale design, suitable for panoramic shooting.

### Attention

1. Please lock the ball head before using
2. After using the ball head in a wet, sandy or dusty environment clean it carefully (with pure alcohol).
3. Do not use it in sea water.
4. Do not inject corrosive materials into the ball head.
5. Do not use under  $-20^{\circ}$  C and over  $+70^{\circ}$  C.

### Specifications




Model		L x B x H		
FHP-53P	ø 30 mm	72.5 x 43.5 x 81 mm	0.27 kg	5 kg

**Service:** Rollei Service Germany  
Denisstraße 28a, D-67663 Kaiserslautern  
Hotline +49 (0)6 31/3 42 84 49

**Distribution:** Rollei GmbH & Co. KG  
Tarpfen 40/Gebäude 7b, D-22419 Hamburg  
[www.rollei.com](http://www.rollei.com)

\*Design and specification are subject to real product.

Thank you for choosing our products. Please read carefully before using.

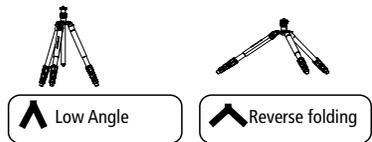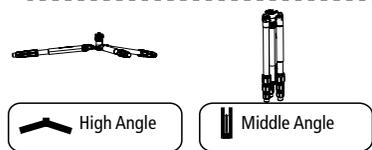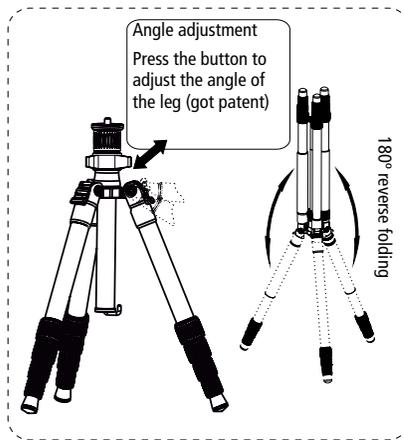


Including tripod bag and tool.

In order to improve the product, the design/specification/parameter can be changed which are subject to real object.

## Features

1. This colorful tripod is specially designed for travel enthusiasts and outdoor photographers. It is compact in size, extendable in height, lightweight, colorful and can be carried with ease.
2. Three angle design, two section separate hidden center column, when shooting, just release the locking sleeve to increase the height.
3. All aviation aluminum magnesium alloy forging, CNC precision technology, anodic oxidation process.

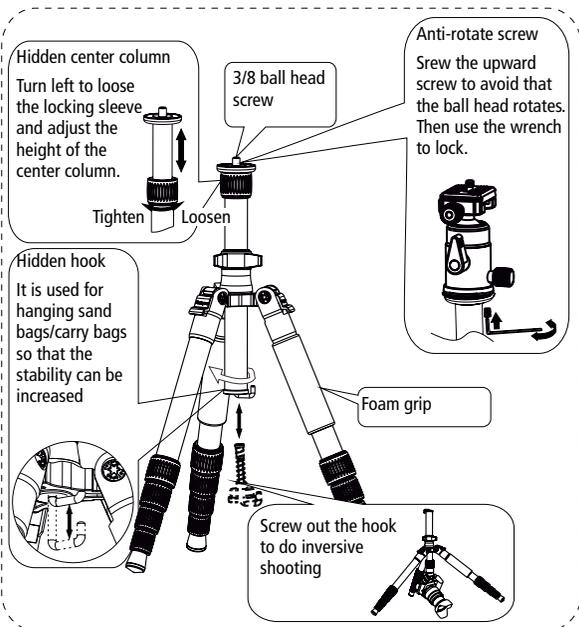

Compact	Sections	Max D	Folded	Min H	Max H	Weight	Loading
Traveler 1	5	22 mm	320 mm	300 mm	1400 mm	1.2 kg	5 kg

## Attentions

1. Do not overload the tripod.
2. Use the locking sleeve when using the product in the status of tightening the center column.
3. Do not use the tripod under  $-20^{\circ}\text{C}$  and over  $+70^{\circ}\text{C}$ .
4. Do not use the tripod for a long time in the sun.
5. Use carefully when operating in dangerous places.
6. Do not move the tripod and equipment (camera) together.
7. Lubricant is not needed, however, please use standard lubricant or lipa when necessary.
8. For your own safety, do not let the product touch any electrical objects, high voltage equipment and superactive chemicals.

\*Design and specification are subject to real product.